



Product Data Sheet

Category: Signage / Project / Architectural

Application: Surface Mounted Lighting

Product Code: LF-TM-WW-196-24 through to LF-TM-CW-196-24

Product Name: LED Flex – TM Series 24V



- Features:**
- Super bright 2835 SMD LED chip, double row
 - 24V input
 - Cuttable every 71mm
 - Full roll of 5m continuous length
 - 120° beam angle
 - IP20 (indoor) rating, also available in IP67 (add “-A” to the end of the code)
 - Easy installation with pre-applied 3M tape to back
 - Custom warmer/cooler colour temperatures available
 - CRI = >80

Technical Data:

Product Code	Input Voltage	Colour	LED Chip Size	LED Quantity	PCB Size	CRI	Power	Lumen Output	Beam Angle	IP Rating
LF-TM-WW-196-24	24VDC	Warm White (2800-3000K)	2835	196 LEDs/m	15mm	>80	21W/m	2442lm/m	120°	IP20
LF-TM-NW-196-24	24VDC	Natural White (4000-4500K)	2835	196 LEDs/m	15mm	>80	21W/m	2448lm/m	120°	IP20
LF-TM-CW-196-24	24VDC	Cool White (5500-6500K)	2835	196 LEDs/m	15mm	>80	21W/m	2456lm/m	120°	IP20



Product Data Sheet

Category: Signage / Project / Architectural


Application: Surface Mounted Lighting

Product Code: LF-TM-WW-196-24 through to LF-TM-CW-196-24

Product Name: LED Flex – TM Series 24V



Dimensional Drawings:

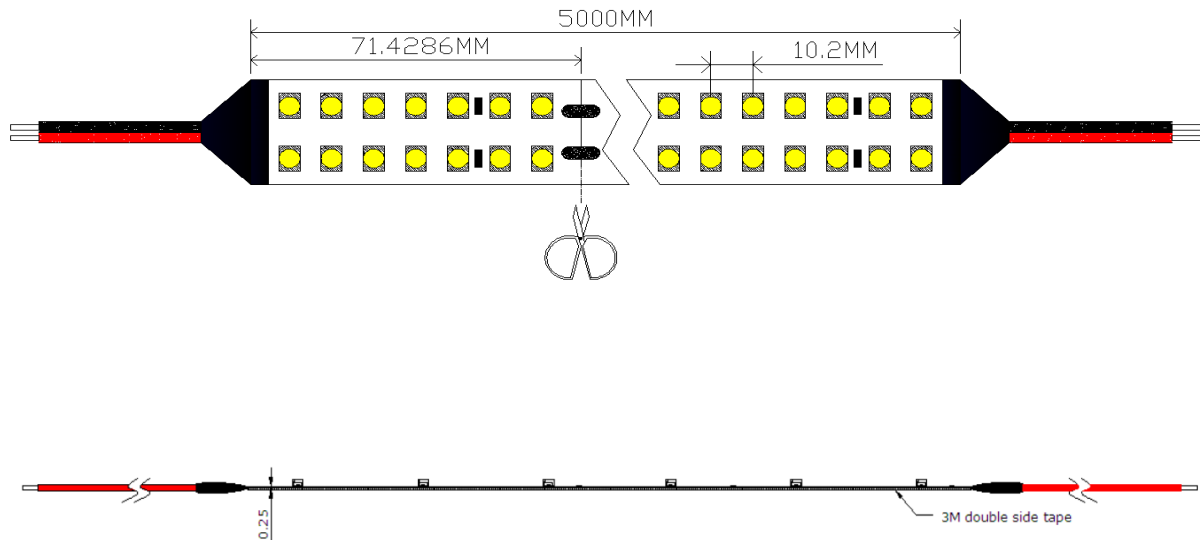

S SIGNAGE **P** PROJECT **A** ARCHITECTURAL **R** RETAIL **C** COMMERCIAL